

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 05-018924

(43)Date of publication of application : 26.01.1993

(51)Int.Cl.

G01N 27/22

G01N 33/02

(21)Application number : 03-167136

(71)Applicant : TOTO LTD

(22)Date of filing : 08.07.1991


(72)Inventor : MATSUNO TAKANORI  
OTANI TAKAYUKI

## (54) METHOD AND SENSOR FOR JUDGING RIPENING DEGREE OF FRUIT AND THE LIKE

### (57)Abstract:

**PURPOSE:** To detect ripening degree readily without damaging a fruit by measuring the change in conductivity or dielectric constant of the fruit and the like with a ripening-degree judging sensor, and judging the ripening degree of the content.

**CONSTITUTION:** The head of a ripening-degree judging sensor S is brought close to or into contact with the surface of the exodermis of a fruit A. When an operating switch 24 is turned ON, a high-frequency electromagnetic field is applied on an exciting electrode 16 from a high-frequency oscillator 19. The electromagnetic wave oscillated in the electrode 16 is received with a receiving detecting coil 17. The result is displayed on a DC voltmeter 23 through a high-frequency detecting diode 22. Thus, a resonance peak is observed in a certain frequency. Namely, the resonance peak in a certain frequency is associated with conductivity. The resonance peak in a certain frequency is associated with dielectric constant. Therefore, the judging sensor S can detect the ripening degree by setting the frequency based on whether the inside of the fruit is conductive or inductive.

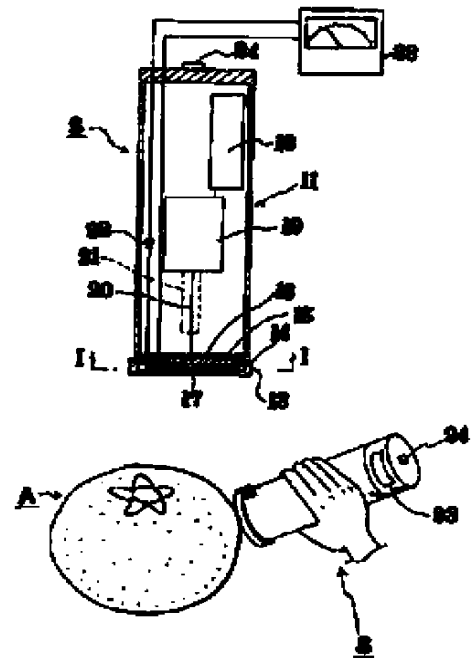

(19)日本国特許庁 (J P)

(12) 公 開 特 許 公 報 (A)

(11)特許出願公開番号

特開平5-18924

(43)公開日 平成5年(1993)1月26日

(51)Int.Cl.<sup>5</sup>

G 0 1 N 27/22  
33/02

識別記号

庁内整理番号

F I

技術表示箇所

C 7363-2 J  
7906-2 J

審査請求 未請求 請求項の数 3 (全 4 頁)

(21)出願番号 特願平3-167136

(22)出願日 平成3年(1991)7月8日

(71)出願人 000010087

東陶機器株式会社

福岡県北九州市小倉北区中島2丁目1番1号

(72)発明者 松野 孝則

神奈川県茅ヶ崎市本村2-8-1 東陶機器株式会社茅ヶ崎工場内

(72)発明者 大谷 孝幸


神奈川県茅ヶ崎市本村2-8-1 東陶機器株式会社茅ヶ崎工場内

(74)代理人 弁理士 松尾 憲一郎

(54)【発明の名称】 果実等の熟成度の判定方法及び熟成度判定センサ

(57) y v æ

y ɪ ɒ ' ° n 画  
y ʏ z ° d - f 図 A  
< x > ɛ z T - " ɛ ~ 最  
ɛ • Ø - ~ ~ ɕ Ø B 無  
g > U - ɸ ɕ % a 性  
' ɸ A a N p d 弱  
Ø M p o R C ~ ' 理  
" • ° « 接  
> ~ ~ A M p o R C 離  
> " / U g ~ » - 弱  
Ø B ] \ ~ A a N p d 弱  
« Ø - A - « 最  
x " d < l d ɸ l - » ɕ 離  
> ɛ s / - ~ " - « Ø B 重  
b h ~ Ø fl ~ ɕ 最  
' A ° ' fl Ø - ~ 最  
Z T " ɕ I g > 性  
o R C ' ʏ < ɸ 離  
- « ɸ

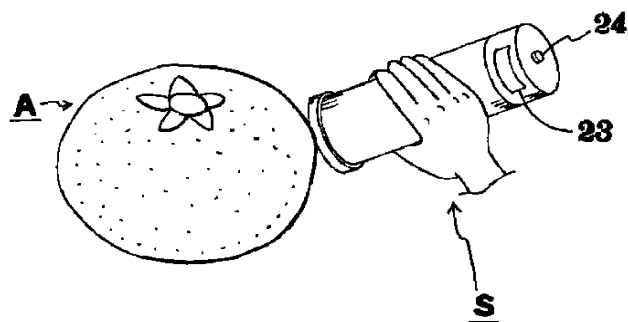

(2)

、 J % T | 要

1

2

y ` ı ž  
y ı P ° d - f " 要  
x » Ł Z T - " Ł ~ A 要  
~ ` ¥ ~ • Ø ° 要  
y ı Q n < x » Ł Z T " A

10

20

30


40

50

% - A d - f W  
Ø B B<sub>2</sub> n fl Ø / U s [ N 要  
- A U d f " « > " Ø 要  
y O O P W z ] ` ~ A ° 要  
" A B<sub>1</sub> t Ł A 要  
" A <sub>2</sub> B t Ł ~ n 要



y } s

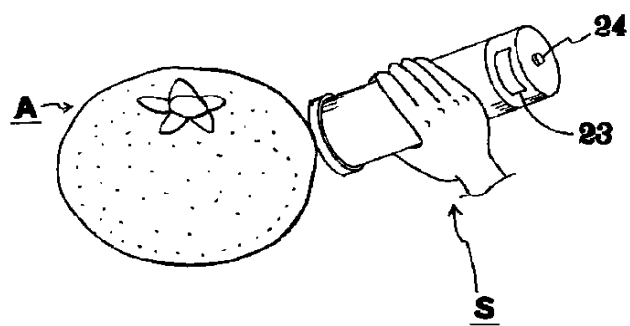

y } z

